



SLM-300GHARDWARE ILLUSTRATION SHEET Qty. Qty. D1 D1. 1/2" BOLT CAP -----[36PCS] A1. 1/2"X5 1/2" HEX HEAD BOLT ----[6PCS] D2 A2. 1/2"X5" HEX HEAD BOLT -----[4PCS] D2. 2"X4" END CAP (9211-014)-----[1PCS] D3. 45X45 END CAP (9211-091)-----[1PCS] A3. 1/2"X4 1/2" HEX HEAD BOLT ----[2PCS] D4. Ø16X14 STEEL BUSHING (8530-003)-[8PCS] A4. 1/2"X3 1/4" HEX HEAD BOLT ----[2PCS] D3 A5. 3/8"X2 3/4" HEX HEAD BOLT ----[4PCS] D5. Ø8 SPRING SNAP LINK (8810-001)--[3PCS] A6. 3/8"X1 3/4" HEX HEAD BOLT ----[2PCS] D7. 2"X4" FOOT CAP (9211-028)-----[2PCS] D4 8 A7. 5/16"X3" HEX HEAD BOLT ----[2PCS] D8. 50X45 NYLON BUSHING (9211-030)-[1PCS] D5 A8. 7/16"X1 1/2" ROUND BOLT ----[1PCS] D9. Ø1"X135L RUBBER GRIP (9212-016)-[1PCS] D10. Ø4 1/2" PULLEY (9213-010)----[6PCS] A9. 5/16"X3/8" SET SCREW -----[3PCS] A10. 5/8"X1 3/4" ROUND BOLT ----[1PCS] D11. Ø3/4" SHAFT COLLAR (9211-046)--[2PCS] D12. 2"X4" RUBBER DOUNT (9212-009)--[2PCS] A11. 15LB BALL PIN -----[1PCS] A12. Ø10X85L PIN -----[1PCS] D13. Ø3" NYLON WASHER (9214-008)---[4PCS] ره و ه D8 B1. 1/2" NYLON LOCK NUT -----[12PCS] D14. NO-SLIP TAPE (9630-003)-----[2PCS] B2. 3/8" NYLON LOCK NUT -----[6PCS] D15. Ø4" RUBBER DONUT (9310-017)---[2PCS] 8 B3. 5/8" LOCK NUT -----[1PCS] D16. Ø6"X10" FOAM ROLLER (9161-016)--[2PCS] C1. 1/2" ROUND END CAP WASHER --[24PCS]D17. CHROME TOP PLATE (8400-002)---[1PCS] C2. 3/8" ROUND END CAP WASHER --[12PCS]D18. WEIGHT SELECTOR BAR (8220-060)-[1PCS] C3. 1/2" (I.D)WASHER -----[2PCS] D19. 2700mm STEEL CABLE -----[1PCS] (D20. 3350mm STEEL CABLE -----[1PCS] C4. 5/16" (I.D)WASHER -----[2PCS] (D21. Ø5/8" ROUND END CAP (9211-015) [4PCS] C5. 5/16" SPRING WASHER -----[2PCS] D22. Ø1" SHAFT COLLAR (8130-024)----[2PCS] C6. 5/8" SPRING WASHER -----[1PCS] D12 / D13 D16 C7. Ø4" CHROME WASHER-----[2PCS] D11 D14 D15 D17 D21 D22 PAGE 1

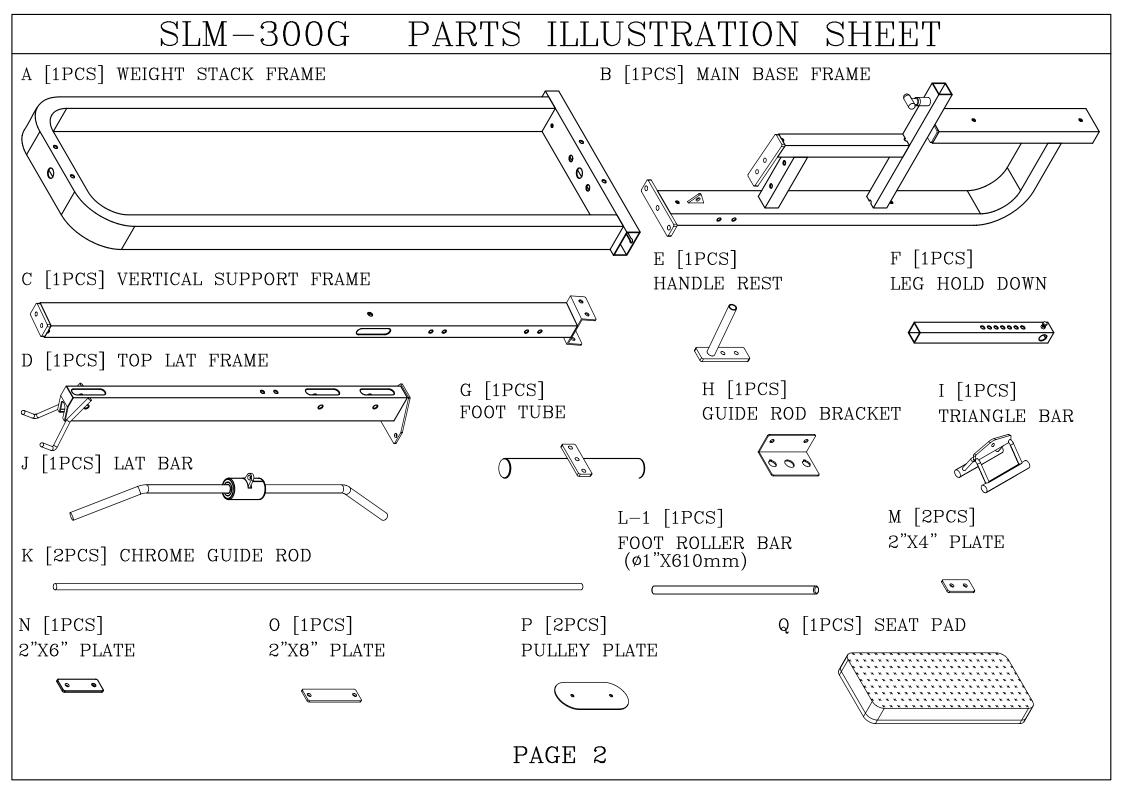

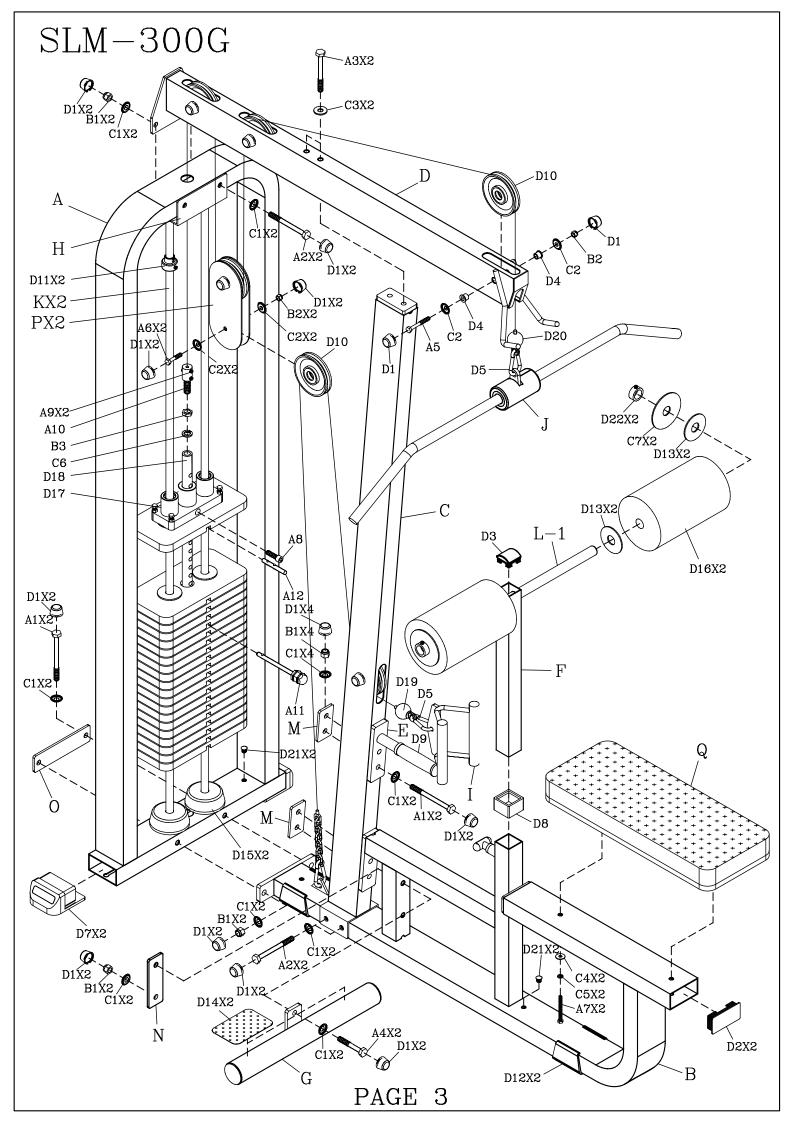

SLM-300G LAT MACHINE ASSEMBLY STEPS

STEP-1

NOTE: DO NOT TIGHTEN UNTS AND BOLTS SECURELY UNTIL YOU HAVE COMPLETED ALL ASSEMBLY STEPS.

- □ Attach A Weight Stack Frame to B Main Base Frame.
- □ Attach C Vertical Support Frame to B Main Base Frame.
- □ Attach K Chrome Guide Rods and D15 Rubber Donuts to A Weight Stack Frame.
- ☐ Slide Weight Stack Plates and D17 Chrome Top Plate onto K Chrome Guide Rods.

STEP-2

- □ Attach H Guide Rod Bracket and D Top Lat Frame to A Weight Stack Frame and C Vertical Support Frame and attach D11 Shaft Collar.
- □ Slide F Leg Hold Down into B Main Base Frame.
- □ Slide L Foot Roller Bar into F Leg Hold Down.
- □ Attach E Handle Rest to C Vertical Support Frame.
- □ Attach G Foot Tube to B Main Base Frame.

CAUTION: DO NOT OVERTIGHTEN PAD BOLTS.

OVERTIGHTENING WILL STRIP

T-NUTS IN THE WOOD.

STEP-3

- □ Attach Q Seat Pad to B Main Base Frame.
- □ Attach D16 Foam Rollers to L Foot Roller Bar.
- ☐ Attach Pulleys and Cables as shown.
- ☐ Attach End Caps, Grips and Numbers.
- ☐ TIGHTEN ALL NUTS AND BOLTS SECURELY.
- ☐ Attach Bolt Caps.

SAFETY RULES

- 1. Penodically check that all nuts, bolts and screws are fully tightened on your LAT MACHINE.
- 2. Exercise with care. Perform your exercises at a smooth moderate pace; never perform jerky or uncoordinated movements that may cause injury.
- 3. It is recommended that you should workout with a training partner.
- 4. Warning: CONSULT YOUR PHYSICIAN BEFORE STARTING YOUR EXERCISE PROGRAM. IT IS ADVISABLE TO HAVE A PHYSICAL EXAMINATION BEFORE YOU ENTER ANY EXERCISE PROGRAM. FOR YOUR OWN SAFETY, DO NOT BEGIN ANY EXERCISE WITHOUT PROPER INSTRUCTION.

SLM-300G LAT MACHINE 20X3tX25L=8PCS 0